



# ALUMINUM ELECTROLYTIC CAPACITORS

## UHV High Ripple Low Impedance

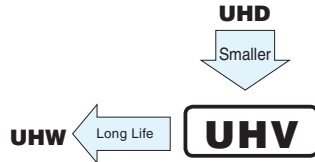


- Lower impedance at high frequency range.
- Smaller case size and high ripple current.
- Compliant to the RoHS directive (2011/65/EU).

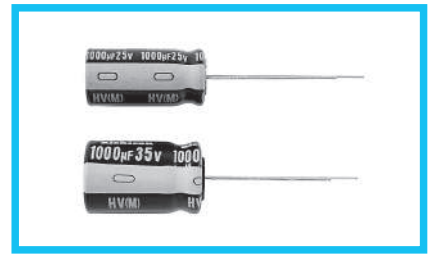

### Specifications

Item	Performance Characteristics												
Category Temperature Range	-40 to +105°C												
Rated Voltage Range	6.3 to 35V												
Rated Capacitance Range	47 to 8200µF												
Capacitance Tolerance	±20% at 120Hz, 20°C												
Leakage Current	After 2 minutes' application of rated voltage at 20°C, leakage current is not more than 0.01CV or 3 (µA), whichever is greater.												
Tangent of loss angle (tan δ)	Rated voltage (V)	6.3	10	16	25	35	120Hz 20°C						
	tan δ (MAX.)	0.21	0.18	0.15	0.13	0.11							
For capacitance of more than 1000µF, add 0.02 for every increase of 1000µF.													
Stability at Low Temperature	Rated voltage (V)	6.3	10	16	25	35	120Hz						
	Impedance ratio ZT / Z20 (MAX.)	Z-25°C / Z+20°C	2	2	2	2		2					
		Z-40°C / Z+20°C	3	3	3	3	3						
	Endurance	The specifications listed at right shall be met when the capacitors are restored to 20°C after D.C. bias plus rated ripple current is applied for 6000 hours (5000 hours for φD=5 and 6.3) at 105°C, the peak voltage shall not exceed the rated voltage.					<table border="1"> <tr> <td>Capacitance change</td> <td>Within ±25% of the initial capacitance value (6.3V 10V : ±30%)</td> </tr> <tr> <td>tan δ</td> <td>200% or less than the initial specified value</td> </tr> <tr> <td>Leakage current</td> <td>Less than or equal to the initial specified value</td> </tr> </table>		Capacitance change	Within ±25% of the initial capacitance value (6.3V 10V : ±30%)	tan δ	200% or less than the initial specified value	Leakage current
Capacitance change	Within ±25% of the initial capacitance value (6.3V 10V : ±30%)												
tan δ	200% or less than the initial specified value												
Leakage current	Less than or equal to the initial specified value												
Marking	Printed with white color letter on black sleeve.												

### Radial Lead Type

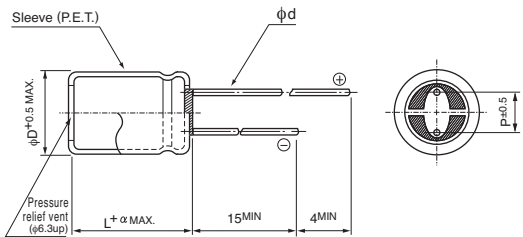


α		(mm)					
α	(L < 20)	1.5					
	(L ≥ 20)	2.0					
φD		5	6.3	8	10	12.5	16
P		2.0	2.5	3.5	5.0	5.0	7.5
φd		0.5	0.5	0.6	0.6	0.6 <sup>※</sup>	0.8

※In case L > 25 for the φ12.5 dia. unit, lead dia. φd = 0.8mm.

• Please refer to page 20 about the end seal configuration.

### Type numbering system (Example : 25V 150µF)

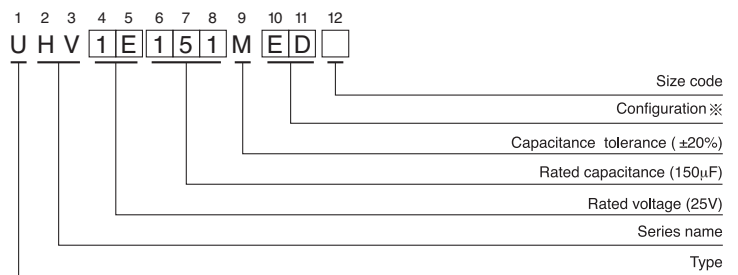

※ Configuration

φ D	Pb-free leadwire Pb-free PET sleeve
5	DD
6.3	ED
8 · 10	PD
12.5 · 16	HD

Please refer to page 20, 21, 22 about the formed or taped product spec.  
Please refer to page 4 for the minimum order quantity.

• Dimension table in next page.

## UHV

### Standard Ratings

Cap. (μF)		V (Code) Item Code		6.3 (0J)			10 (1A)			16 (1C)					
				Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz
					20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
100	101									5 × 11	0.23	0.76	360		
150	151									5 × 11	0.23	0.76	360		
220	221	5 × 11	0.23	0.76	360	6.3 × 11	0.10	0.33	450	6.3 × 11	0.10	0.33	450		
330	331	6.3 × 11	0.10	0.33	460	6.3 × 11	0.10	0.33	550	6.3 × 11	0.10	0.33	550		
470	471	6.3 × 11	0.10	0.33	550	8 × 11.5	0.059	0.181	820	8 × 11.5	0.059	0.181	830		
680	681	8 × 11.5	0.059	0.181	900	8 × 11.5	0.059	0.181	990	8 × 11.5	0.059	0.181	990		
820	821	8 × 11.5	0.059	0.181	990	8 × 11.5	0.059	0.181	990	10 × 12.5	0.043	0.133	1360		
1000	102	10 × 12.5	0.043	0.133	1250	10 × 12.5	0.043	0.133	1250	10 × 12.5	0.043	0.133	1250		
1200	122	10 × 12.5	0.043	0.133	1360	10 × 12.5	0.043	0.133	1360	10 × 12.5	0.043	0.133	1360		
1500	152	8 × 20	0.031	0.105	1550	8 × 20	0.031	0.105	1550	8 × 20	0.031	0.105	1550		
1800	182	10 × 16	0.030	0.095	1815	10 × 16	0.030	0.095	1815	10 × 16	0.030	0.095	1815		
2200	222	10 × 20	0.019	0.057	2160	10 × 20	0.019	0.057	2160	10 × 20	0.019	0.057	2160		
2700	272	10 × 25	0.017	0.051	2475	10 × 25	0.017	0.051	2475	10 × 25	0.017	0.051	2475		
3300	332	12.5 × 20	0.016	0.041	2500	12.5 × 20	0.016	0.041	2500	12.5 × 20	0.016	0.041	2500		
3900	392	12.5 × 20	0.016	0.041	2725	12.5 × 20	0.016	0.041	2725	12.5 × 20	0.016	0.041	2725		
4700	472	12.5 × 25	0.014	0.036	3190	12.5 × 25	0.014	0.036	3190	12.5 × 25	0.014	0.036	3190		
5600	562	12.5 × 31.5	0.012	0.031	3795	12.5 × 31.5	0.012	0.031	3795	12.5 × 31.5	0.012	0.031	3795		
6800	682	12.5 × 35.5	0.011	0.029	3925	12.5 × 35.5	0.011	0.029	3925	12.5 × 35.5	0.011	0.029	3925		
8200	822	16 × 25	0.012	0.033	3990	16 × 25	0.012	0.033	3990	16 × 25	0.012	0.033	3990		

Cap. (μF)		V (Code) Item Code		25 (1E)			35 (1V)				
				Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz	Case size φD × L (mm)	Impedance (Ω) MAX.		Rated ripple (mArms) 105°C / 100kHz
					20°C / 100kHz	-10°C / 100kHz			20°C / 100kHz	-10°C / 100kHz	
47	470					5 × 11	0.23	0.76	360		
68	680	5 × 11	0.23	0.76	360	6.3 × 11	0.10	0.33	450		
100	101	6.3 × 11	0.10	0.33	450	6.3 × 11	0.10	0.33	550		
150	151	6.3 × 11	0.10	0.33	550	8 × 11.5	0.059	0.181	820		
220	221	8 × 11.5	0.059	0.181	810	8 × 11.5	0.059	0.181	990		
270	271	8 × 11.5	0.059	0.181	900	8 × 15	0.046	0.143	1330		
330	331	8 × 11.5	0.059	0.181	990	10 × 12.5	0.043	0.133	1360		
390	391	8 × 15	0.046	0.143	1330	8 × 20	0.031	0.105	1550		
470	471	10 × 12.5	0.043	0.133	1360	10 × 16	0.030	0.095	1815		
560	561	8 × 20	0.031	0.105	1550	10 × 20	0.019	0.057	2160		
680	681	10 × 16	0.030	0.095	1815	10 × 25	0.017	0.051	2475		
820	821	10 × 20	0.019	0.057	2160	12.5 × 20	0.016	0.041	2475		
1000	102	10 × 25	0.017	0.051	2475	12.5 × 20	0.016	0.041	2920		
1200	122	12.5 × 20	0.016	0.041	2475	12.5 × 25	0.014	0.036	3190		
1500	152	12.5 × 20	0.016	0.041	2725	12.5 × 31.5	0.012	0.031	3795		
1800	182	12.5 × 25	0.014	0.036	3190	12.5 × 31.5	0.012	0.031	3795		
2200	222	12.5 × 31.5	0.012	0.031	3795	16 × 25	0.012	0.033	3990		
2700	272	12.5 × 35.5	0.011	0.029	3925						
3300	332	16 × 25	0.012	0.033	3990						

▲ : In this case, [6] will be put at 12th digit of type numbering system.

### Frequency coefficient of rated ripple current

Cap. (μF)	120Hz	1kHz	10kHz	100kHz or more
47 to 150	0.40	0.75	0.90	1.00
220 to 560	0.50	0.85	0.94	1.00
680 to 1800	0.60	0.87	0.95	1.00
2200 to 3900	0.75	0.90	0.95	1.00
4700 to 8200	0.85	0.95	0.98	1.00